

KA-750

12V BSP00016AC12 / 24V BSP00016AC24



A/C



Performance

cold ❄️ 10.4kW	+	airflow 🌀 544 (m ³ /hr)
-----------------------------	---	---

Electrical Data

volts	amps	/	volts	amps
12V	26A		24V	-A

Applications



Performance Input Data

temp	humidity
32°C	70%

Horizontal Evaporator Unit

Position

Roof liner






KA-750

12V BSP00016AC12 / 24V BSP00016AC24



Weight

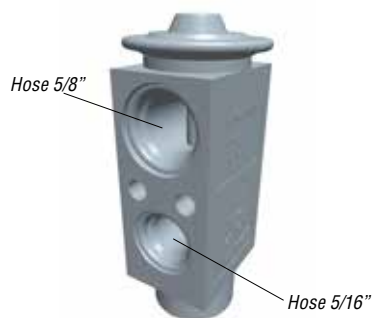

Expansion valve 2.0 TON

To ensure you have a complete kit to enable you chosen system to operate please check the system schematic data sheet which details the full list of components required.

T // +44 (0)1453 891320
E // sales@apairltd.com
W // www.apairltd.com



Follow us on Twitter @APAIRLtd



Like us on Facebook AP Air Ltd