














CHARACTERISTICS

	AGRILITE 302	AGRILITE 302 YF
	SCR302R	SCR302H
		
TYPE OF REFRIGERANT		
 AUTOMATIC WORKING CYCLE	●	●
 HIGH PRECISION RECOVERY FUNCTION	●	●
AUTOMATIC OIL INJECTION refillable bottles OIL LOCK	●	●
 AUTOMATIC DYE INJECTION refillable dyes OIL LOCK	V	V
HEATER BELT	V	V
USB PORT	●	●
 OPTIONAL Nitrogen/forming gas test kits CFU-NITRO / CFU-NITRO.HD.XX	V	V
INTERNAL DATA BASE including commercial and agricultural vehicles inscription to Oksyslab included	●	●
 READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	●	●
 INTERNAL FLUSHING	●	●
 BLUETOOTH CONNECTION APP OKSY ² GEN+	●	●
  CONFIGURABLE GAS TYPE from HFO1234YF to -->R134a		●



● STANDARD SUPPLY V OPTION

ACCESSORIES

	CODE	DESCRIPTION	AGRILITE 302	AGRILITE 302 YF
	ACC-88.072	Gas bottle adapter ¼	V	
	ACC-88.011	Straight adapter HP ¼	V	
	ACC-88-289H	Universal bottle adapter HFO1234YF		V
	O-PK00051 O-PK00051 OPZ	Printer kit	V	V
	OPK-00164-OPZ	Pressurization kit	V	V
	OAC-0007	Support trolley for AGRILITE	V	V
	KTB0013	LP+HP Hoses 3 m /Quick Couplings for R134a	V	
	KTB0013	LP+HP Hoses 7,5 m /Quick Couplings for R134a	V	
	KTB0012	LP+HP Hoses 3 m /Quick Couplings for R1234YF		V
	KTB0014	LP+HP Hoses 7,5 m /Quick Couplings for R1234YF		V

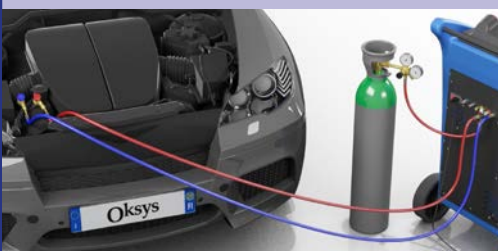


1/2021

NITROGEN LEAK CHECK OR HYDRO-NITROGEN**CODE** CFU-NITRO

Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2.2 L bottles
- Manifold for the A/C service station connection

**RANGE**

R134a



R1234yf

**MODEL****AGRILITE 302****AGRILITE 302 YF****TECHNICAL FEATURES**

Display	Graphic LCD 128x64 Pixel	Graphic LCD 128x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	9 Kg	9 Kg
Heater Belt	Option	Option
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	50 L/min	50 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz 12V DC	220V 50 Hz 12V DC
Dimensions	50x44x62cm	50x44x62cm
Weight	45/48 Kg	45/48 Kg
Packaging dimensions	58x54x77cm	58x54x77cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	NO	NO
Hoses	NO	NO
Blanket	NO	NO
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES

**Oksys****TOTAL DESIGN FOR BEST PERFORMANCE**